

2/15/2015

**LED Flood Light**  
Howard FLL7B Series  
9W: 650 Lumens

Project:	
Catalog#:	
Approved by:	

LED Fixture

**Features**

- Energy Saving
- Comparable to 50W halogen using less energy.
- 50,000 hour LED lifespan for maintenance-free operation
- Heat dissipating fins for optimized thermal management.

**Specifications**

**Housing**

- Low-copper, aluminum die-cast housing and lens frame.
- Heat dissipating fins for optimized thermal management.
- Durable polyester powder coat finish
- Bronze or white housing

**Lens/Refractor**

- Tempered glass lens, thermal shock and impact resistant.

**LEDs/LED Driver**

- 9W
- Color temp: Neutral White (4100K)
- CRI: 80
- Min. Starting Temperature: -30°C
- 650 Lumen Output
- 50,000 Hour Life
- Input voltage: 120-277V 50/60 Hz

**Mounting**

- 1/2" NPS aluminum die-cast swivel arm fits to standard junction box (not included).
- Side screw at arm knuckles allows for optics aiming.

**Certifications**

- UL/CUL Listed, suitable for Wet Locations
- LightingFacts®



**Warranty**

- 2-Year Warranty


UPC Code	Model #	Input Wattage	Lumens	Driver	Voltage	Housing Color
08127	FLL7B	9	650	LED	120-277	Bronze
08134	FLL7B-W	9	650	LED	120-277	White

**Applications**

Ideal for security, accenting architecture, displays, and signs.



**PHOTOMETRIC**

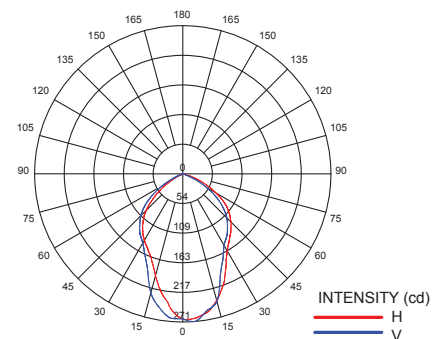

**Sample Ordering Number:**

Howard FLL7B  
LED Flood Light  
9W  
650 Lumens  
4100K  
120-277 volts

Specifications subject to change without notice.

